



## UE-330SSAV

### TYPE

SEMI-AUTO, SWIVEL HEAD, VARIABLE SPEED  
HYDRAULIC VISE, SWIVELING CONTROL BOX

### MOTOR

3HP 6P 1430RPM (50HZ)

### BLADE SPEED

20-80MPM (66-264FPM)

### BLADE SIZE

34x1.1x4100MM

### CAPACITY

90° ● 330MM ■ 330x480MM ▬ 225x530MM

45° ● 275MM ■ 300x275MM

30° ● 330MM ■ 330x415MM

### PACKING MEASUREMENT

2300x940x1450MM

### N.W. / G.W.


750KGS/860KGS

### CONTAINER LOADS


6 SETS/20' 13 SETS/40'




•The **Control Box** with color coded cutting feed indicator is mounted on a swiveling post so it can be positioned 180° from front to back.

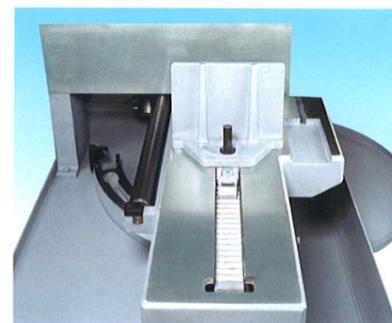

•**Quick Vise** with rack system and **Feed Roller** on the band saw table.

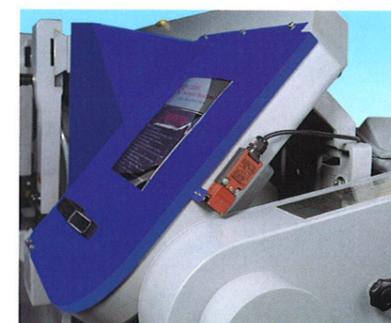


•A CE approved **Limit Switch** to cut off power when the blade cover is opened. (For CE market only)

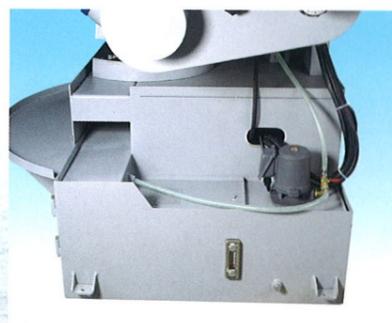

• The **Coolant System** has been redesigned to allow for easier cleaning of pump and tank.



•A **Hydraulic Vise** with variable pressure for different types of materials to be clamped. (Optional)

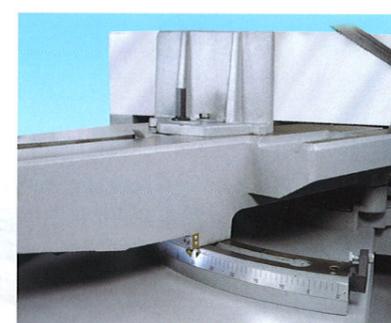

•A **Track Slide** system provides a convenient way to adjust the machine for angle cutting. (For 330SSA)



•The single piece **Blade Cover** is safe, effective, and easy to operate.



•A color coded **Control Panel** to indicate the proper speed when cutting different types of material. (For 330SA)



•A **Water Gun** for cleaning chip build up and debris on the machine.



•**Stroke limit switches** to set the most efficient cutting stroke distance of the saw arm.



•A **Stop Bar** to use as a guide to cut premeasured lengths of materials. It is adjustable to angles of 0-45 degrees. (For 330SSA)



•Adjustable blade tension, **Scale** and safety **Limit Switch** to cut off power when the blade breaks.